


Atlas Workholding Stationary 2 and 3 Jaw Power Chuck

OLU 6" - 10" Chucks

- ⊕ Super thin body
- ⊕ Accuracy, plus minus .0005"
- ⊕ Easy Retrofit
- ⊕ Hydraulic Operation Standard
- ⊕ Optional air operation
- ⊕ Standard 1.5mm 60 degree fine serrated master jaws
- ⊕ 1 year warranty

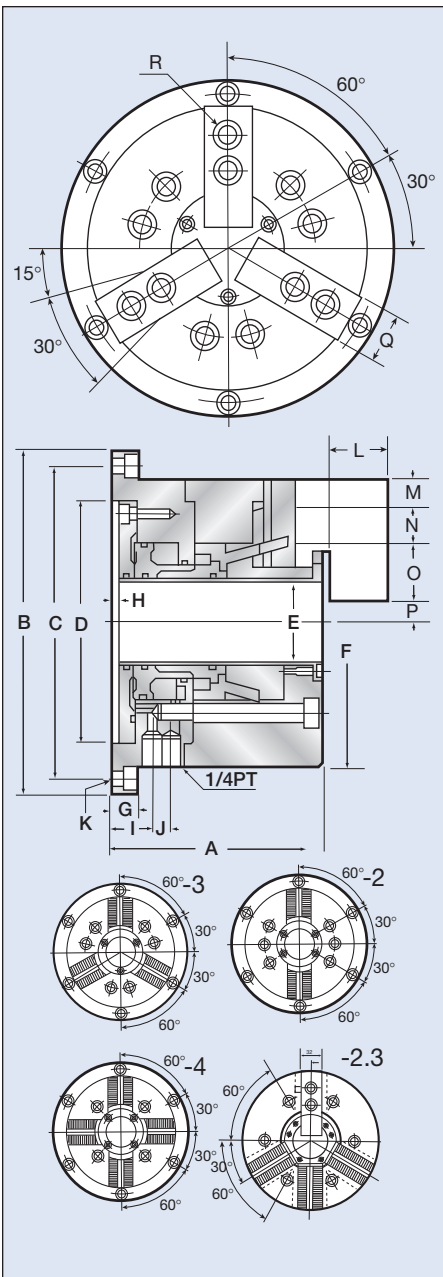

Model	Stroke	Jaw Stroke Dia.	Hydraulic Pressure	Max. Grip ID	Max. Grip OD	Weight
OLU06D	.591"	.197"	350 psi	6,888 lbs.	4,774 lbs.	46 lbs.
OLU08D	.787"	.256"	350 psi	11,270 lbs.	6,370 lbs.	72 lbs.
OLU10D	.787"	.256"	350 psi	19,180 lbs.	13,020 lbs.	98 lbs.

Dimensional Data

MODEL	OLU06D	OLU08D	OLU10D
A	4.96"	5.79"	6.30"
B	7.80"	9.76"	10.87"
C	7.09"	8.86"	9.84"
D	5.51"	6.69"	8.66"
E	1.65"	2.05"	2.95"
F	6.50"	8.07"	10.00"
G	.59"	.59"	.71"
H	.177"	.177"	.197"
I	1.10"	1.10"	1.18"
J	1.38"	1.73"	2.17"
K	M8	M8	M10
L	1.42"	1.50"	1.65"
M	.59"	.94"	1.18"
N	.79"	.98"	1.18"
O	1.46"	1.81"	1.97"
P max.	.394"	.531"	.650"
P min.	.197"	.256"	.394"
Q	1.26"	1.38"	1.57"
R	M10 x 30	M12 x 35	M12 x 35

Hydraulic unit pump and tank available

HOW TO ORDER: State quantity, Model Number of chuck and shipping instructions.